

RAVAS-2100L


Pallet truck scale with multirange graduation

BENEFITS

- Angled fork tips for easy access to low and closed pallets
- High accuracy: 200g increments
- Exchangeable battery module
- Automatic switch off function
- Pallet truck with quicklift pump
- For check weighing, batching and filling

Top quality

Made in Europe

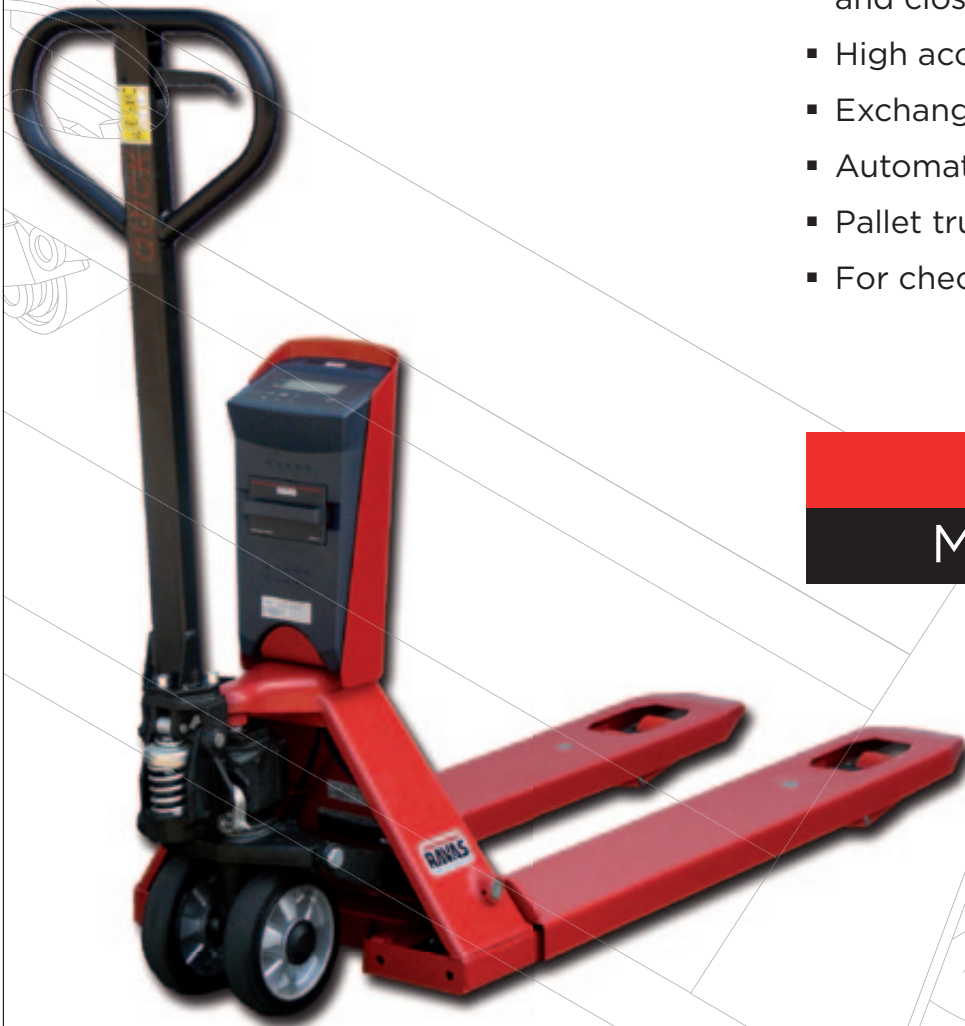

RAVAS

FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic and manual tare up to 200 kg
- Totalling with sequence number
- Error messages in display
- Automatic switch-off after 30 minutes of non-use
- Low battery warning in display


STANDARD SPECIFICATIONS

- Weighing capacity 2,200 kg
- Graduation multirange:
 - 0 - 200 kg: graduation 0.2 kg
 - 200 - 500 kg: graduation 0.5 kg
 - 500 - 2,200 kg: graduation 1 kg
- Max. tolerance 0.1% of the load lifted
- Display LCD, digit height 18 mm
- Keypad 3 function keys, on/off key
- Protection class load cells IP67, indicator IP65
- Battery 12Vdc/1.2Ah, exchangeable; battery charger included
- Battery life 35 hours, low battery indication in display
- Charger 230V/12Vdc - 300 mA
- Charging time approximately 6 hours
- Steering wheels rubber
- Loading wheels polyurethane, tandem
- Pump quick lift
- Own weight 107 kg
- Colour red (RAL 3000), epoxy painted

For approved versions, class OIML III: European approval no. T2782, switch-off of display when tilting more than 2°. Graduation: multirange 0.5/1 kg, or one of the following fixed graduations:

- 1,000 divisions : 1.0/1,000 kg or 2.0/2,000 kg
- 2,000 divisions : 0.5/1,000 kg or 1.0/2,000 kg
- 3,000 divisions : 0.1/300 kg or 0.2/600 kg or 0.5/1,500 kg

DIMENSIONS IN MM

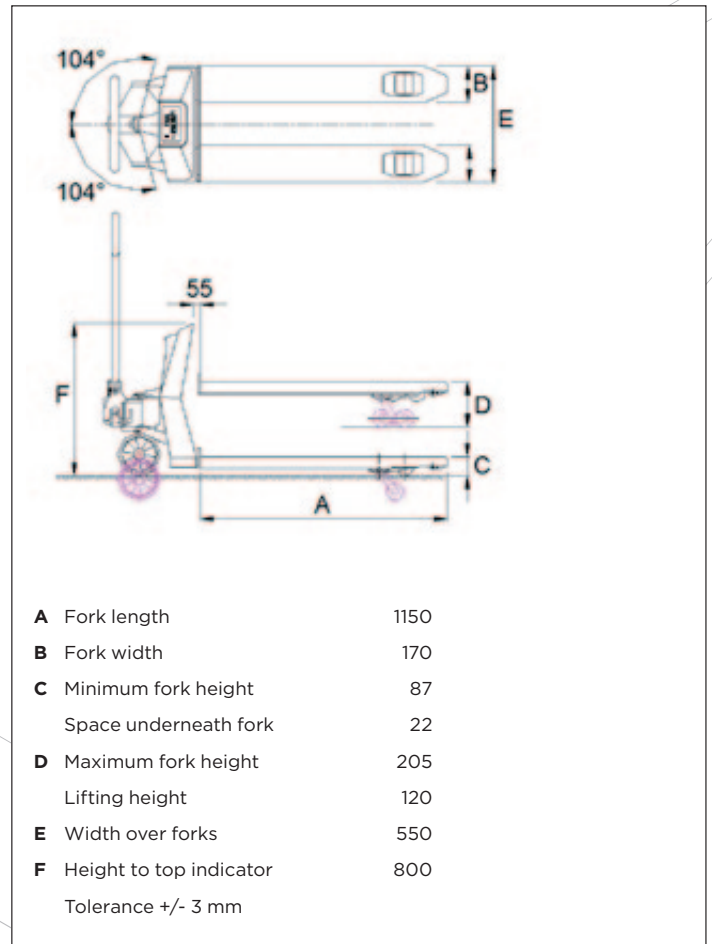

ISO 9001:2008
ISO 14001:2004
www.tuv.com
ID: 0000057200

PREMIUM OPTIONS*

- Extra exchangeable battery pack
- Built-in thermal printer
- Bluetooth or WLAN output
- Legal for trade version, OIML III

OPTIONS*

- Multirange graduation 0.1/0.2/0.5 kg
- Stainless steel fork shoes
- Stainless steel or galvanized truck
- Footbrake or handbrake
- Fork lengths: 950 - 2,500 mm (fork height 90 mm)
- Width over forks 690 mm (fork height 90 mm)
- Capacity 3,000 kg @1 kg graduation (fork height 90 mm)

* The use of options may change related specifications

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
backoffice@ravas.com, www.ravas.com

RAVAS